

# RODAJA DE ACERO INOX. USO MEDIANO



**Stainless Steel**

Durable Superior Casters' stainless steel kingpinless casters are designed to withstand harsh environments and applications that would normally rust and corrode standard zinc plated casters; they will also hold up to demanding shock load applications that may cause traditional kingpin casters to fail. We manufacture our S5 Series casters out of S304 non-ferrous stainless steel, the drop forged 1/4" thick top plate and raceways are integrated with a single row of 3/8" stainless ball bearings. The swivel section features a 2-3/8" diameter precisely machined raceway. The legs are formed from 1/4" thick S304 stainless steel, double welded to the outer raceway for maximum strength. To enhance their corrosion resistance, completed assemblies undergo a passivation process to remove any iron picked up in production. Popular applications include; clean rooms, laboratories, medical & hospital facilities, animal cages, pharmaceutical plants, autoclaves, food processing, bakeries, dairy, food service, catering, hospitality, chemical factories, marine environments, fisheries, cruise ships, and etc.

- All metal parts made out of S304 non-ferrous STAINLESS STEEL. 100% washable.
- Top plate and inner raceway is a one piece forged construction. (forging process strengthens the grain structure of stainless steel and is stronger than competing, machined and welded designs).
- Features a wide range of wash down friendly, high temperature and autoclavable wheels.
- Zerk grease fitting in raceway and 1/2" wheel axle.
- Precision bearings available for ergonomic mobility.
- NSF Listed.
- Standard stock series = Quick deliveries.

NSF LISTED

RoHS Compliant


TRY DuraQuick™  
Shipping

Expedite 24Hr.


Expedited Factory Drop Ship Service - On In Stock Parts.

Fastening Specifications			
Plate Code	Overall Size	Bolt Hole Pattern	Mounting Bolt Size
17	4 x 4-1/2	2-5/8 x 3-5/8 to 3 x 3	3/8

## Options

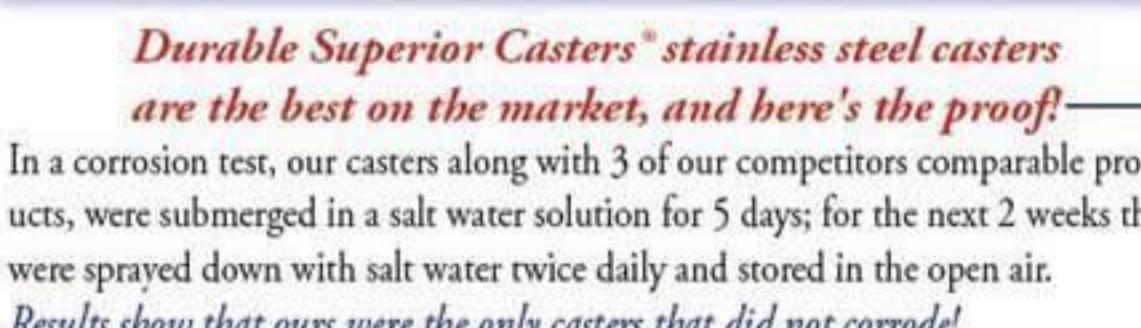

4-Position Lock Bolt-on.  
Order Separately  
Part # 4PSL31

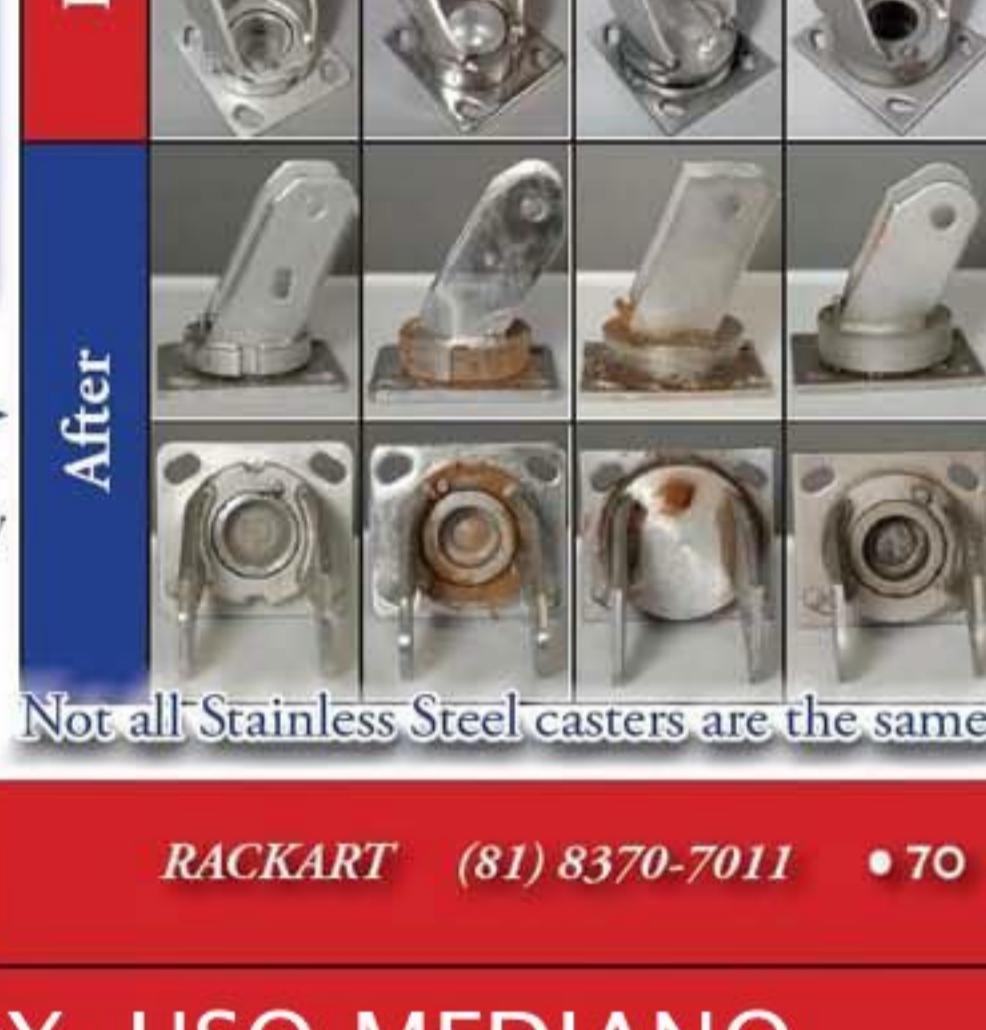

**Durable Superior Casters' stainless steel casters are the best on the market, and here's the proof!**

In a corrosion test, our casters along with 3 of our competitors comparable products, were submerged in a salt water solution for 5 days; for the next 2 weeks they were sprayed down with salt water twice daily and stored in the open air.

Results show that ours were the only casters that did not corrode!

\*An independent metallurgical laboratory test also discovered that "Brand A" contains less chromium and nickel, the main corrosion resistant elements in stainless steel.

Not all Stainless Steel casters are the same!

RACKART (81) 8370-7011 • 70

# RODAJA DE ACERO INOX. USO MEDIANO

ORDERING INSTRUCTIONS: S5 Series Swivel Caster Part Numbers shown below -For Rigid casters change prefix S5 to S6									
Dia	Tread Width	Wheel Type	Load Cap	Roller Bearing 05	Sealed Precision BB 65, 72	Delrin, Bronze & Plain: 11, 12, 56, 57, 88, 96	+Color	Overall Height	Swivel Radius
				CHOOSE BEARING TYPE: When multiple bearing choices exist; replace ## with desired bearing code.					
4	2	Yoke Only	400	S5ZZ40JZ8317YY	S5NM40JB6S17YY	S5NR40JB##17YY	I,T,X,Y	5-5/8	3-1/8
		Nomadic™	400	S5NM40JB0517YY	S5NR40JB6S17YY	S5TP40JB##17YY			
		Rubber on Nylon	400	S5NR40JB0517YY	S5TP40JB6S17YY	S5PO40JB##17YY			
		Thermo-Pro™	300	S5TP40J+0517YY	S5TP40J+6S17YY	S5TP40J##17YY			
		Polyolefin	500	S5PO40JB0517YY	S5PO40JB6S17YY	S5PO40JB##17YY			
		Nylon	800	S5NY40JE0517YY	S5NY40JE6S17YY	S5HI40JB##17YY			
		RokHard™	800	S5HI40JB0517YY	S5HI40JB6S17YY	S5GN40Q##17YY			
		BrimStone™	800	S5GN40QJ0517YY	S5GN40QJ6S17YY	S5MA40JB##17YY			
		MaxRok™	800	S5MA40JB0517YY	S5PH40JB6S17YY	S5PH40JB##17YY			
		Phenolic	800	S5PH40JB0517YY	S5HT40JQ0517YY	S5HT40J##17YY			
5	2	High-Temp Phenolic	600	S5HT40JQ0517YY	S5MU40J+7217YY	S5MU40J##17YY	G,K I,D,K,U,W	6-1/2	3-3/4
		Polyon MaxRok™	700	S5MU40J+0517YY	S5PP40J+6S17YY	S5PP40J##17YY			
		Poly-Pro™	500	S5PP40J+0517YY	S5PP40JM7217YY	S5PP40JM##17YY			
		Poly-Pro™	500	S5PP40JM0517YY	S5PM40J7217YY	S5PM40JI##17YY			
		Polymadic™	600	S5PM40JI0517YY	S5SU40JL6S17YY	S5SU40JL##17YY			
		DuraLastomer™	750	S5SU40JL0517YY	S5HU40JI7217YY	S5HU40JI##17YY			
		ErgoLastomer™	1000	S5HU40JI0517YY	S5HU40JI7217YY	S5HU40JI##17YY			
		Yoke Only	500	S5ZZ50JZ8317YY	S5NM50JB6S17YY	S5NR50JB##17YY			
		Nomadic™	450	S5NM50JB0517YY	S5NR50JB6S17YY	S5TP50J##17YY			
		Rubber on Nylon	450	S5NR50JB0517YY	S5TP50J+6S17YY	S5PO50JB##17YY			
6	2	Thermo-Pro™	350	S5TP50J+0517YY	S5PO50JB6S17YY	S5PO50JB##17YY	G,K I,D,K,U,W H,M	7-1/2	4-1/2
		Polyolefin	650	S5PO50JB0517YY	S5NY50JE0517YY	S5NY50JE##17YY			
		Nylon	900	S5NY50JE0517YY	S5NY50JE6S17YY	S5HI50JB##17YY			
		RokHard™	1000	S5HI50JB0517YY	S5HN50JQ0517YY	S5GN50JQ##17YY			
		BrimStone™	1000	S5GN50JQ0517YY	S5SL50JO7217YY	S5SL50J##17YY			
		SteROLLERizer™	375	S5SL50JO517YY	S5MA50JB6S17YY	S5MA50JB##17YY			
		MaxRok™	1000	S5MA50JB0517YY	S5PH50JB6S17YY	S5PH50JB##17YY			
		Phenolic	1000	S5PH50JB0517YY	S5HT50JQ0517YY	S5HT50J##17YY			
		High-Temp Phenolic	750	S5HT50JQ0517YY	S5MU50J+7217YY	S5MU50J##17YY			
		Polyon MaxRok™	1000	S5MU50J+0517YY	S5PP50J+6S17YY	S5PP50J##17YY			
8	2	Poly-Pro™	600	S5PP50J+0517YY	S5PP50JM7217YY	S5PP50JM##17YY	G,K I,D,K,U,W H,M	9-1/2	5-15/16
		Poly-Pro™	600	S5PP50JM0517YY	S5PM50J7217YY	S5PM50JI##17YY			
		Polymadic™	750	S5PM50JI0517YY	S5SU50JL6S17YY	S5SU50JL##17YY			
		DuraLastomer™	900	S5SU50JL0517YY	S5HU50JI7217YY	S5HU50JI##17YY			
		ErgoLastomer™	1400	S5HU50JI0517YY	S5HU50JI7217YY	S5HU50JI##17YY			
		Yoke Only	600	S5ZZ60JZ8317YY	S5NM60JB6S17YY	S5NR60JB##17YY			
		Nomadic™	550	S5NM60JB0517YY	S5NR60JB6S17YY	S5TP60J##17YY			
		Rubber on Nylon	550	S5NR60JB0517YY	S5TP60J+6S17YY	S5PO60JB##17YY			
		Thermo-Pro™	500	S5TP60J+0517YY	S5PO60JB6S17YY	S5NY60JE##17YY			
		Polyolefin	700	S5PO60JB0517YY	S5NY60JE6S17YY	S5HI60JB##17YY			
10	2	Nylon	1000	S5NY60JE0517YY	S5NY60JE6S17YY	S5NY60JE##17YY	I,T,X,Y	10-1/2	6-15/16
		RokHard™	1200	S5HI60JB0517YY	S5HI60JB6S17YY	S5HN60JQ##17YY			
		BrimStone™	1100	S5GN60JQ0517YY</					